


# Lumirror 10.41

## Application

- Packaging requiring high printing quality and sealing properties

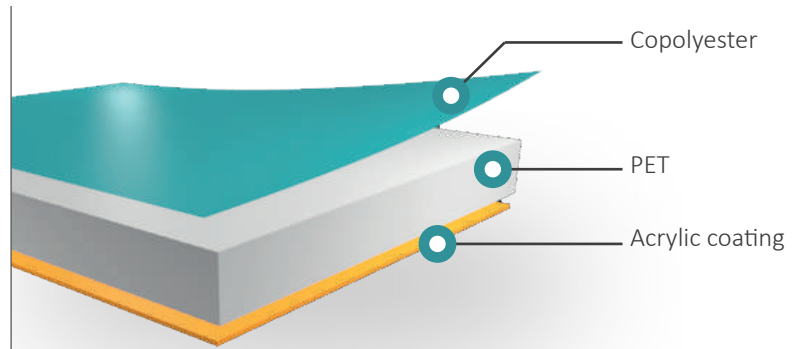

ASYMMETRICAL PET FILM WITH ONE COEXTRUDED & ONE COATED SIDE

## Benefits

- Improved adhesion of inks, adhesives and lacquers on both sides
- Copolyester side heat sealable on itself
- High thermal stability
- Good machinability due to surface roughness

## Typical Values *(These values do not constitute binding specifications)*

Properties	Test Method	Unit	12 µm
<b>YIELD</b>			
Unit Weight		g/m <sup>2</sup>	16.8
Area Yield		m <sup>2</sup> /kg	59.5
<b>MECHANICAL</b>			
Tensile Strength MD	ASTM D 882	daN/mm <sup>2</sup>	19
Tensile Strength TD			22
Elongation at Break MD	ASTM D 882	%	100
Elongation at Break TD			80
<b>THERMAL</b>			
Shrinkage 150°C 30mn MD	Internal Method	%	1.6
Shrinkage 150°C 30mn TD			0.4
<b>OPTICAL</b>			
Gardner Haze	ASTM D1003	%	3.5
<b>SURFACE</b>			
Sealability 140°C – 1s	Internal Method	N/38mm	3.5
<b>BARRIER</b>			
OTR, 23°C - dry	ASTM F1927	cm <sup>3</sup> /m <sup>2</sup> .24h	120
MVTR, 23°C - 90% HR	ASTM F1249	g/m <sup>2</sup> .24h	40


## Regulation

Lumirror® 10.41 complies with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

## Presentation of the rolls

**Roll packaging:** The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2100mm.

**Returnable packaging:** Wooden flanges, plastic flanges and pallets are returnable.

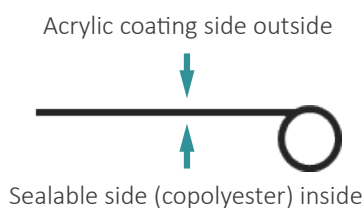

## Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

Lumirror® is a registered trademark of Toray Films Europe SAS - TFE August 2020

**DISCLAIMER:** This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.