


# Lumirror® 60.40

## Application

- Release liner

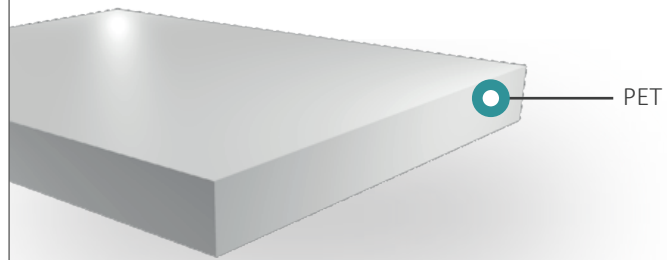

HAZY PET FILM WITH  
HIGH ROUGHNESS

## Benefits

- Thermal stability
- Good flatness
- Excellent machinability due to high roughness
- Certified UL 746 B (105°C) for all thickness and certified VTM2 from 50µm

## Typical Values *(These values do not constitute binding specifications)*

Properties	Test Method	Unit	12µm	23µm	30µm	36µm	50µm	75µm	100µm	125 µm
<b>YIELD</b>										
Unit Weight		g/m <sup>2</sup>	16.8	32.2	42.0	50.4	70.0	105.0	140.0	175.0
Area Yield		m <sup>2</sup> /kg	59.5	31.0	23.8	19.8	14.3	9.5	7.1	5.7
<b>MECHANICAL</b>										
Tensile Strength MD	ASTM D 882	daN/mm <sup>2</sup>	19	20	20	21	20	20	19	19
Elongation at Break MD			%	125	130	130	130	130	145	150
<b>THERMAL</b>										
Shrinkage 150°C 30mn MD	Internal	%	1.4	1.5	1.5	1.5	1.8	1.2	1.0	1.0
Shrinkage 150°C 30mn TD	Method		0.2	0.1	-0.2	0.3	0.3	0.25	0.25	0.25
<b>OPTICAL</b>										
Gardner Haze	ASTM D1003	%	3.2	5.0	7.0	8.0	9.5	11.0	14.0	17.0
<b>SURFACE</b>										
Roughness Rz	DIN 4287	nm	320	350	350	350	400	450	550	580

## Regulation

Lumirror® 60.40 complies with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

## Presentation of the rolls

**Roll packaging:** The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2100mm.

**Returnable packaging:** Wooden flanges, plastic flanges and pallets are returnable.

## Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

Lumirror® is a registered trademark of Toray Films Europe SAS - TFE September 2020

**DISCLAIMER:** This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.